

VT-42

PROCESS GUIDE

UL Approval: E214381 Version: Rev. B4

VT-42 CCL/Laminate VT-42 PP/Prepreg (Standard FR4 Material)

Precautions in Handling

Storage Condition & Shelf Life

		Prepreg		Laminate
Storage Condition	Temperature	Below 23°C (73°F)	Below 5°C (41°F)	Room
	Relative Humidity	Below 55%	/	/
Shelf Life		3 Months	6 Months	24 Months (airproof)

- The prepreg exceeding shelf time should be retested.
- Take care in handling thin core laminates as they are easily damaged.
- If the prepreg is not consumed within 48hrs after opening the vacuum package, it is recommended that the bags be resealed.
- Material is available in both long and short grain. The grain direction is indicated on the label with an arrow.

Designing and Inner layer Process

- Please be careful when single ply of 1080, 1086, 1078 or 106 prepreg is designed to the dielectric layer.
- Dimension stability is the same as Standard FR4 material.
- Please check with your oxide vendor to make sure that our material is suitable with your oxide process. We recommend to control the peel strength with brown oxide copper over 2 Lb/in.
- For unclad or single sided laminates to be used in multilayer, please brush unclad sides before use.

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre, Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
21 Water Street, Amesbury,
Massachusetts, MA 01913,
United States of America
T: +1 978-5219700
Email: saleseast@ventec-usa.com

VT-42

UL Approval: E214381 Version: Rev. B4

PROCESS GUIDE

VT-42 CCL/Laminate VT-42 PP/Prepreg (Standard FR4 Material)

Prepreg Availability

E-Glass styles: 7628, 1506, 1500, 2113, 2313, 3313, 2116, 1080, 1086, 1078, 106, 1067 etc.

Type	Resin Content	Press Thickness (mil)	DK				DF				Remark
			@ 1GHz	@ 2GHz	@ 5GHz	@ 10GHz	@ 1GHz	@ 2GHz	@ 5GHz	@ 10GHz	
7628	46%	8.00	4.16	4.11	4.11	4.06	0.014	0.014	0.014	0.016	Standard
7628	43%	7.60	4.26	4.20	4.20	4.15	0.013	0.013	0.013	0.015	Standard
1506	52%	7.40	3.98	3.92	3.90	3.85	0.015	0.016	0.016	0.017	Standard
2116	55%	5.20	3.93	3.87	3.87	3.80	0.015	0.016	0.016	0.017	Standard
2116	53%	4.90	3.98	3.92	3.90	3.85	0.015	0.016	0.016	0.017	Standard
2113	56%	4.00	3.87	3.82	3.82	3.77	0.015	0.016	0.016	0.017	Standard
1080	65%	3.20	3.68	3.63	3.63	3.58	0.017	0.017	0.018	0.019	Standard
1080	63%	3.00	3.73	3.69	3.65	3.60	0.017	0.017	0.018	0.019	Standard

Remark:

- ① Press thickness test condition---Prepreg lamination size 18"*24", Copper Foil---1oz/1oz, Flow---about 5%;
- ② Make laminated prepreg to micro-section and measure the thickness with microscope; this thickness is used for resistance design calculation.
- ③ The thickness measured with micrometer is 0.2~0.4 mil larger than that measured with micro-section; and mainly used for total thickness design calculation.

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre, Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
21 Water Street, Amesbury,
Massachusetts, MA 01913,
United States of America
T: +1 978-5219700
Email: saleseast@ventec-usa.com

www.ventecclaminates.com

VT-42

PROCESS GUIDE

UL Approval: E214381 Version: Rev. B4

VT-42 CCL/Laminate VT-42 PP/Prepreg (Standard FR4 Material)

Laminates Availability

- Thickness: 0.002" (0.05mm) to 0.200" (5mm), available in sheet or panel form
 - Copper Foil: 1/4 to 12oz, HTE or RTF or DST
- DK values are for impedance design.

Core thk. (inches)	Stack-up	Resin Content	DK				DF				Remark
			@ 1GHz	@ 2GHz	@ 5GHz	@ 10GHz	@ 1GHz	@ 2GHz	@ 5GHz	@ 10GHz	
0.002	1-106	70%	3.55	3.50	3.50	3.45	0.018	0.018	0.019	0.020	Standard
0.003	1-1080	63%	3.73	3.69	3.65	3.60	0.017	0.017	0.018	0.019	Standard
0.004	1-2116	44%	4.17	4.13	4.13	4.08	0.014	0.014	0.015	0.016	Standard
0.004	2-106	70%	3.55	3.50	3.50	3.45	0.018	0.018	0.019	0.020	2ply
0.005	1-2116	53%	3.98	3.92	3.90	3.85	0.015	0.015	0.016	0.017	Standard
0.006	1-506	45%	4.16	4.11	4.11	4.06	0.014	0.014	0.014	0.016	Standard
0.007	1-7628	41%	4.27	4.23	4.23	4.18	0.013	0.013	0.013	0.015	Standard
0.008	1-7628	45%	4.16	4.11	4.11	4.06	0.014	0.014	0.014	0.016	Standard
0.008	2-2116	44%	4.17	4.13	4.13	4.08	0.014	0.014	0.015	0.016	2ply
0.010	2-2116	53%	3.98	3.92	3.90	3.85	0.015	0.015	0.016	0.017	Standard
0.012	2-1506	44%	4.17	4.13	4.13	4.08	0.014	0.014	0.014	0.016	Standard
0.014	2-7628	40%	4.29	4.25	4.25	4.20	0.013	0.013	0.013	0.015	Standard
0.016	2-7628	45%	4.16	4.11	4.11	4.06	0.014	0.014	0.014	0.016	Standard
0.028	4-7628	40%	4.29	4.25	4.25	4.20	0.013	0.013	0.013	0.015	Standard
0.036	5-7628	42%	4.26	4.20	4.20	4.15	0.013	0.013	0.013	0.015	Standard
0.045	6-7628	42%	4.35	4.30	4.22	4.22	0.013	0.013	0.013	0.015	Standard
0.049	7-7628	40%	4.26	4.20	4.20	4.15	0.013	0.013	0.013	0.015	Standard
0.059	8-7628	42%	4.26	4.20	4.20	4.15	0.013	0.013	0.013	0.015	Standard

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre, Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
21 Water Street, Amesbury,
Massachusetts, MA 01913,
United States of America
T: +1 978-5219700
Email: saleseast@ventec-usa.com

www.ventecclaminates.com



VT-42

UL Approval: E214381 Version: Rev. B4

PROCESS GUIDE

VT-42 CCL/Laminate VT-42 PP/Prepreg (Standard FR4 Material)

Press Condition

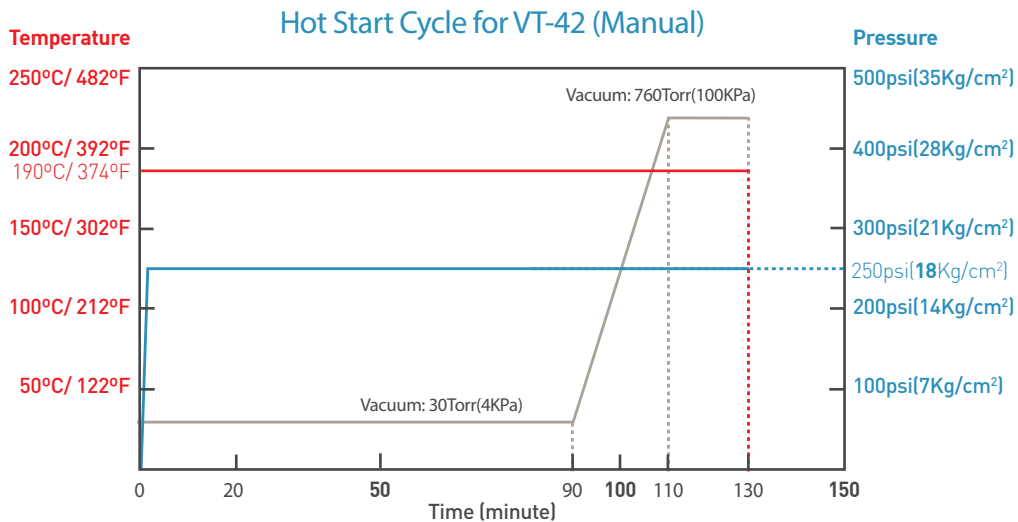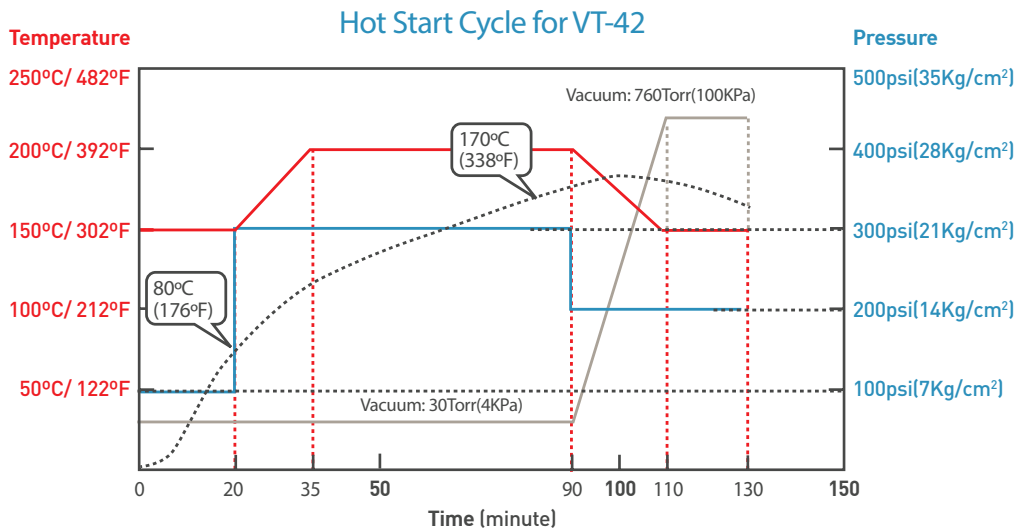

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre, Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
21 Water Street, Amesbury,
Massachusetts, MA 01913,
United States of America
T: +1 978-5219700
Email: saleseast@ventec-usa.com


www.ventecclaminates.com

VT-42

PROCESS GUIDE

VT-42 CCL/Laminate VT-42 PP/Prepreg (Standard FR4 Material)

UL Approval: E214381 Version: Rev. B4

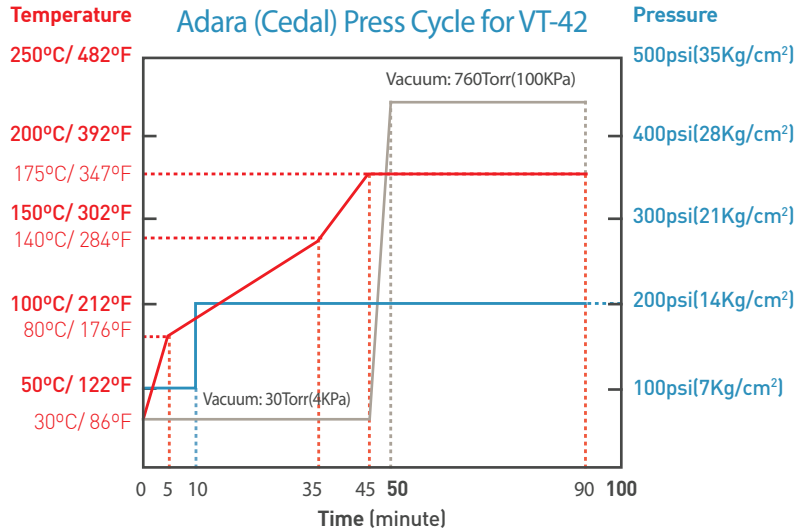

Typical Drilling Parameters (φ0.3-1.0 mm)

1. Spindle Speed:	64-105	KRPM
2. Feed Rate:	100-150	inch / min
3. Retract Rate:	596-600	inch / min
4. Chip Load:	0.7~2.0	mil / Rev.
5. Entry board:	t0.15mm Al	-

Desmearing Process

Standard FR4 Desmear Process

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.

308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129

T: +86 512-68091810

Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe

Unit 1 Trojan Business Centre, Tach-
brook Park Estate,
Leamington-Spa, CV34 6RH, UK

T: +44 1926-889822

Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA

21 Water Street, Amesbury,
Massachusetts, MA 01913,
United States of America

T: +1 978-5219700

Email: saleseast@ventec-usa.com

www.ventec laminates.com